Video: Aluminum On The Porsche 911 Carrera

Porsche 911 Carrera Repairs

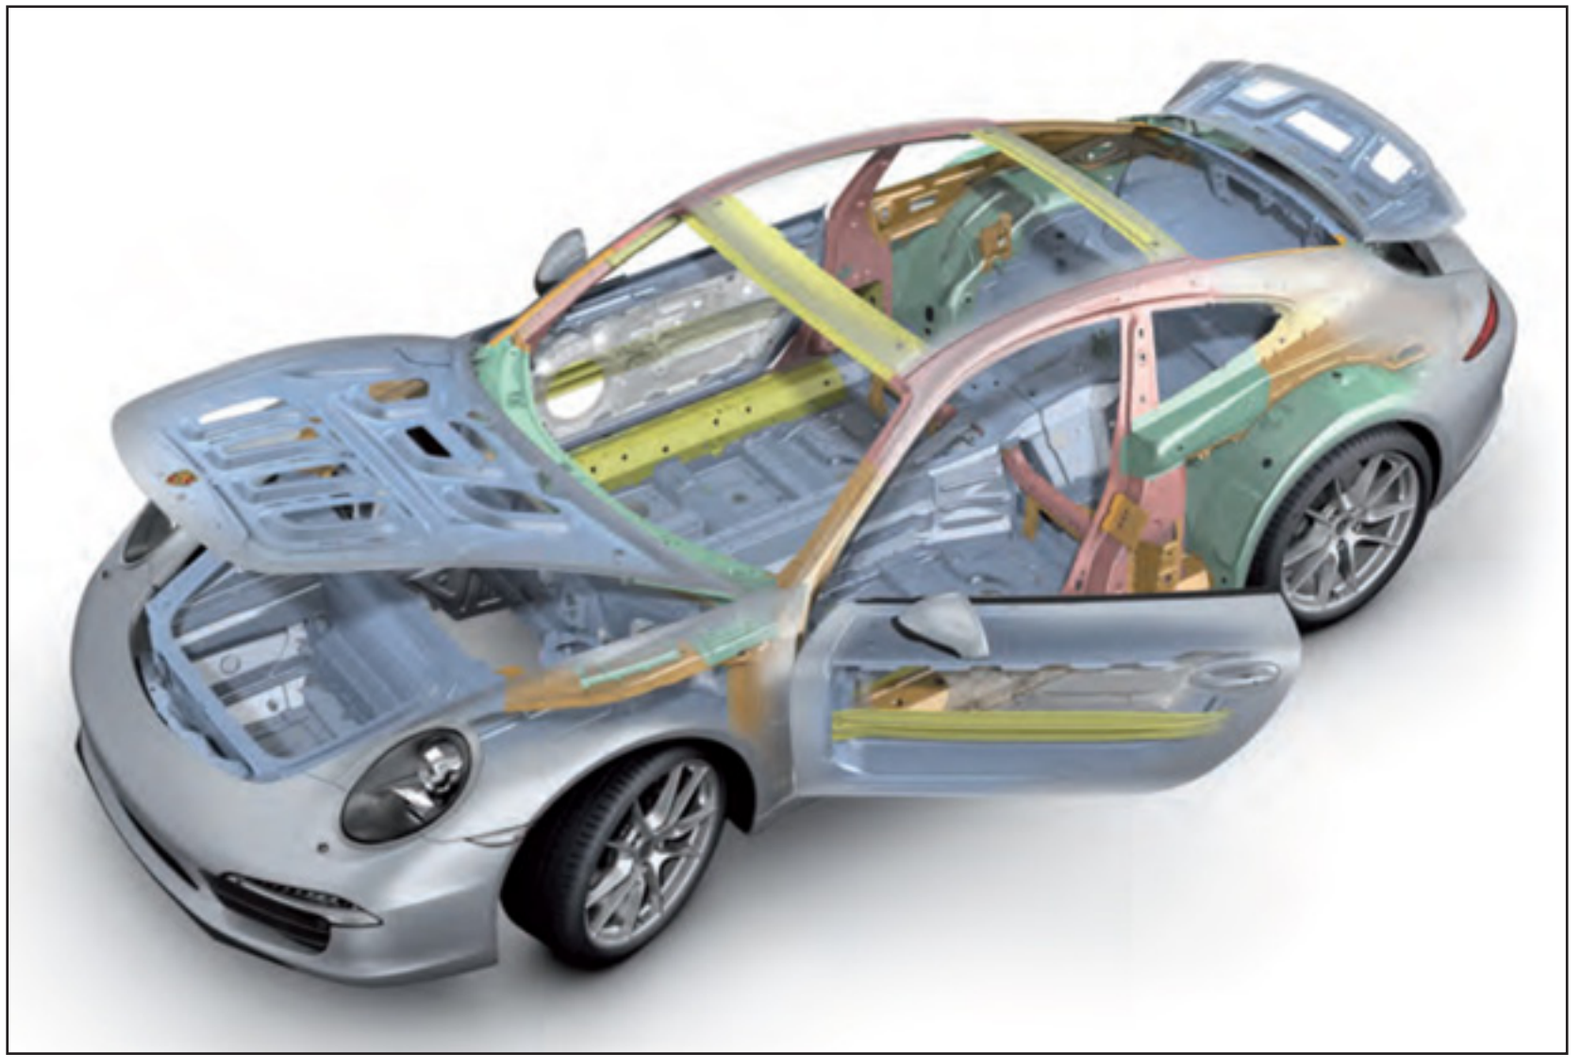

- Replace SPRs with blind rivets and adhesive
  - rivets have special corrosion protection coating
- Replace flow drill screws with flow drill screws and adhesive
- Spot welding and GMA welding specified

PORSCHE®, 911® and the distinctive shape of the PORSCHE® 911® automobile are registered trademarks of Dr. Ing. h.c. F. Porsche AG. Used with permission of Dr. Ing. h.c. F. Porsche AG and Porsche Cars North America, Inc. Copyrighted by Dr. Ing. h.c. F. Porsche AG.

Porsche 911 Carrera Repairs (cont'd)

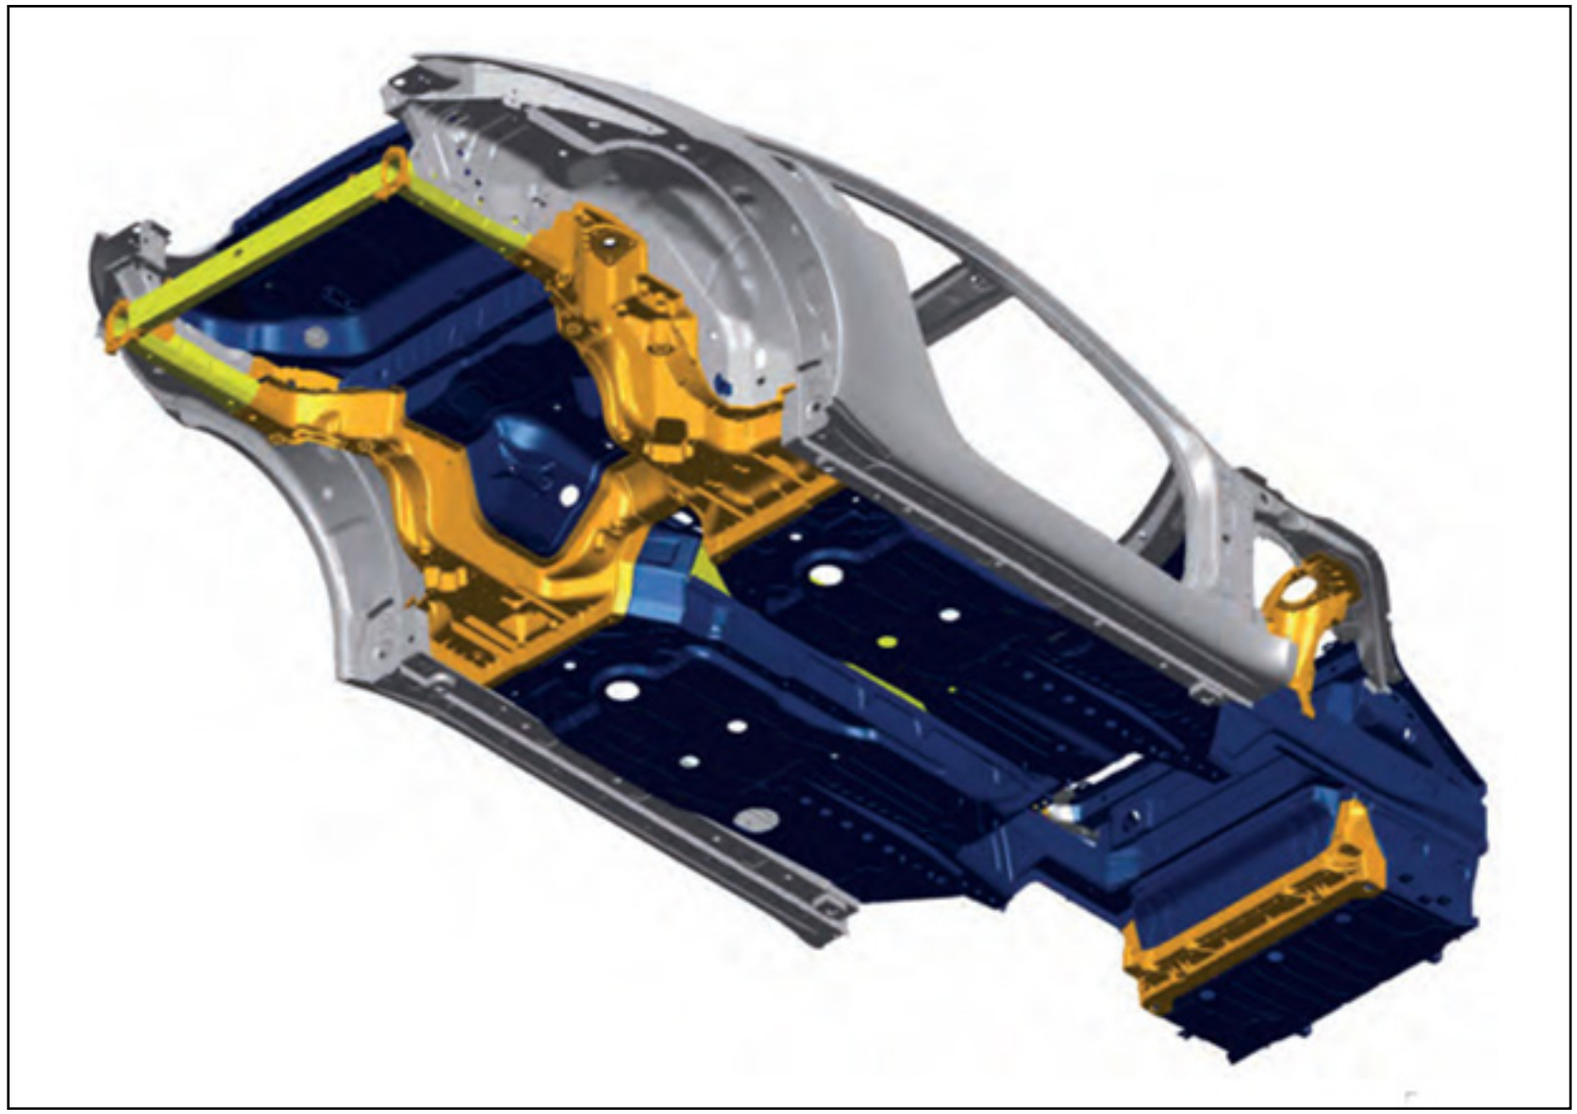

PORSCHE®, 911® and the distinctive shape of the PORSCHE® 911® automobile are registered trademarks of Dr. Ing. h.c. F. Porsche AG. Used with permission of Dr. Ing. h.c. F. Porsche AG and Porsche Cars North America, Inc. Copyrighted by Dr. Ing. h.c. F. Porsche AG.

- **If parts are replaced with adhesive, wait at least 48 hours before release to customer**
- **Aluminum front lower rail sectioning procedure using blind rivets, countersunk screws, and adhesive**

  – no welds